

Top view of a tire assembly 300. The assembly includes a tire 300 mounted on a wheel 400. The wheel 400 has a central hub 200 with six bolts. The tire 300 has a tread pattern with radial grooves 101 and sipes 102. Dimensions L 21 and L 22 are indicated for the tire width, and L 11 and L 12 are indicated for the wheel rim width.

FIG. 1 is a perspective view of a tire 300. The tire 300 is shown in a perspective view, highlighting its tread pattern 101 and sidewall 102. The tread pattern 101 is indicated by a dashed line, and the sidewall 102 is indicated by a solid line. The tire 300 is labeled with the number 300.

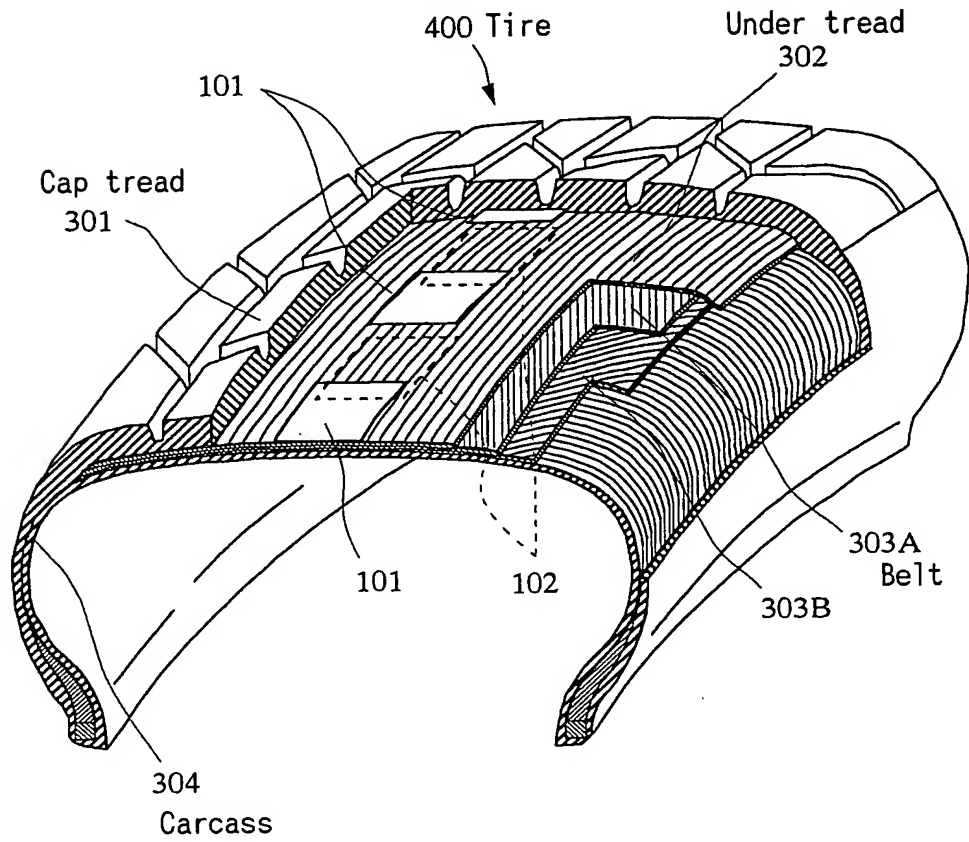
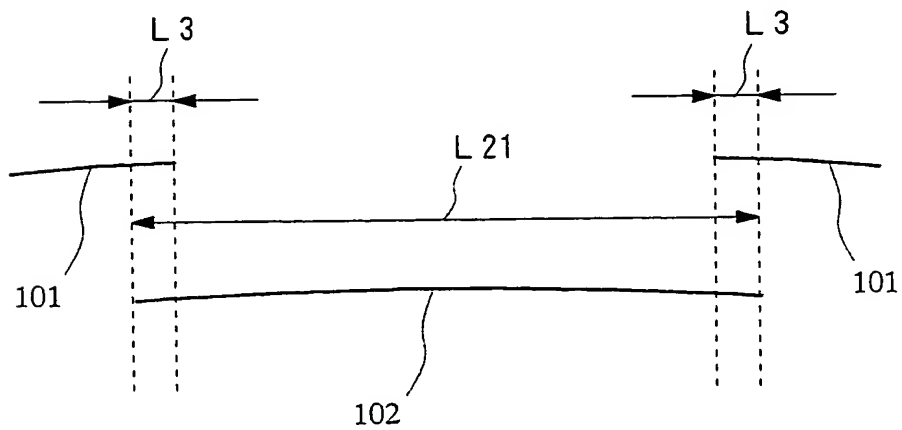
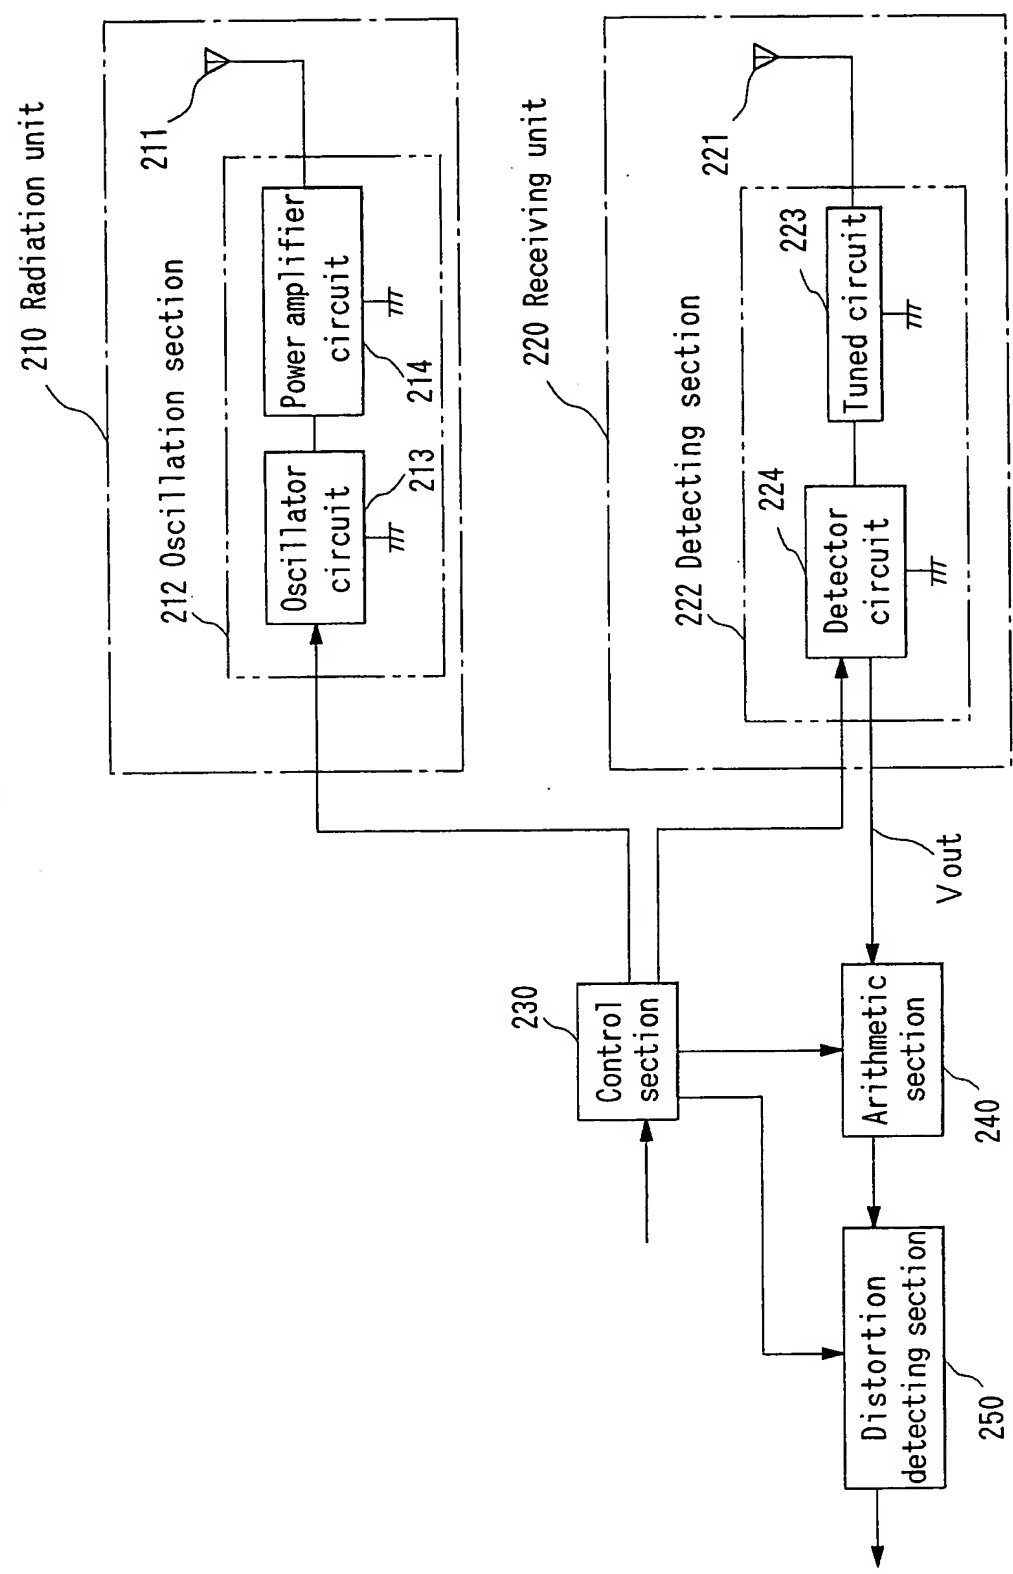
*Fig. 3**Fig. 4*

Fig. 5



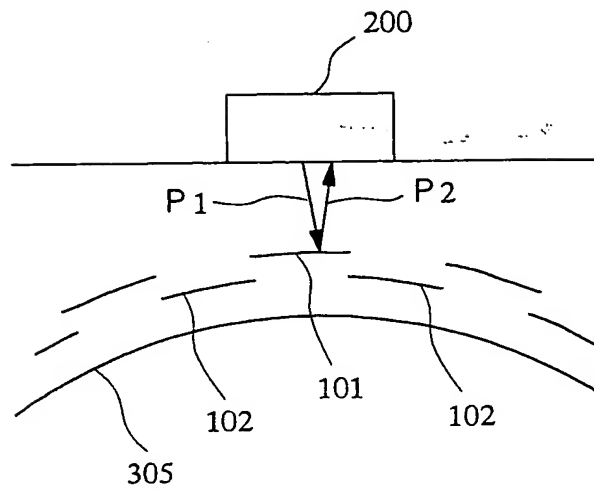
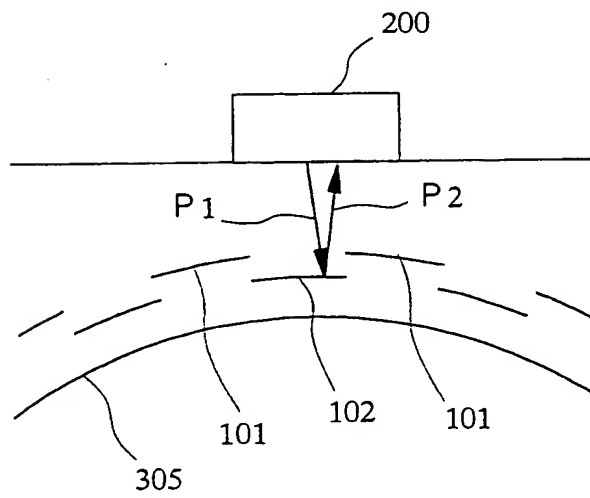
*Fig. 6**Fig. 7*

Fig. 8

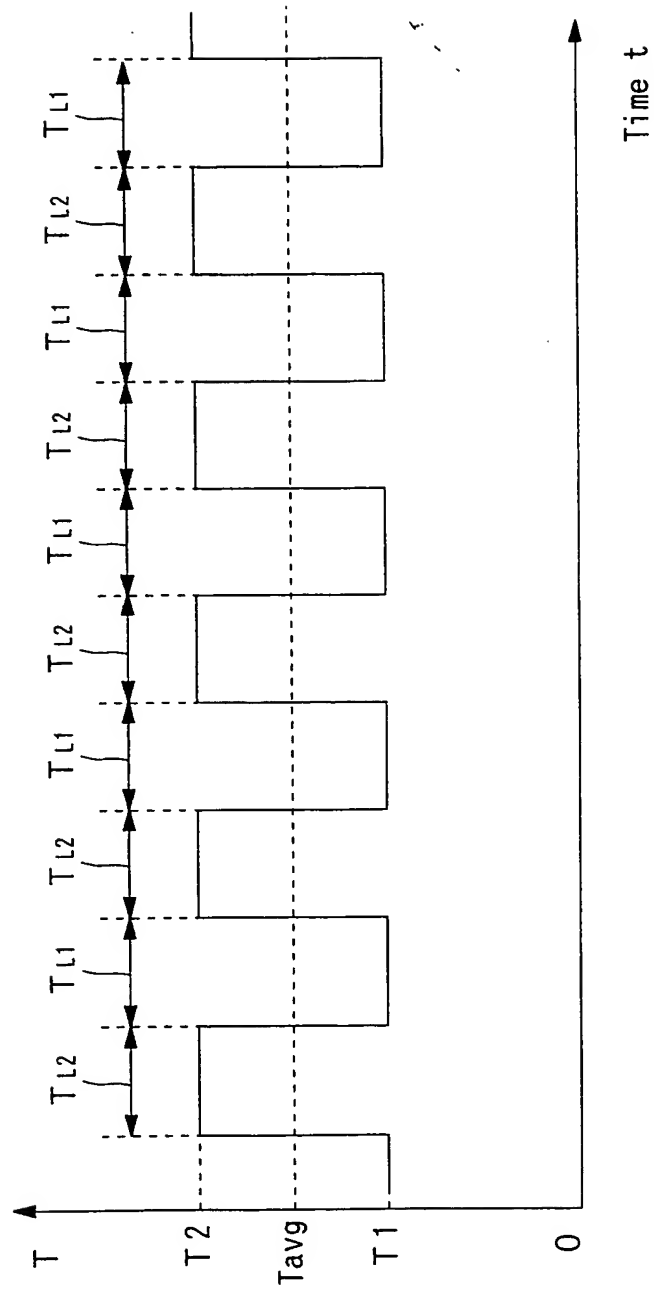


Fig. 9

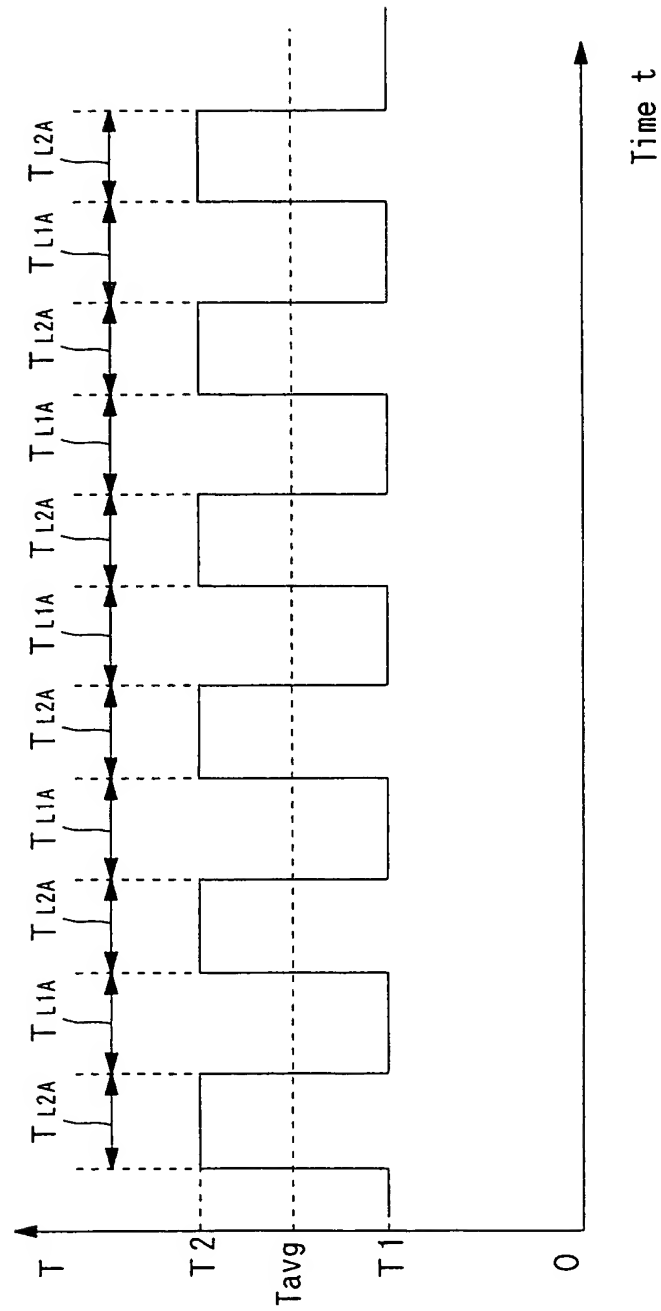
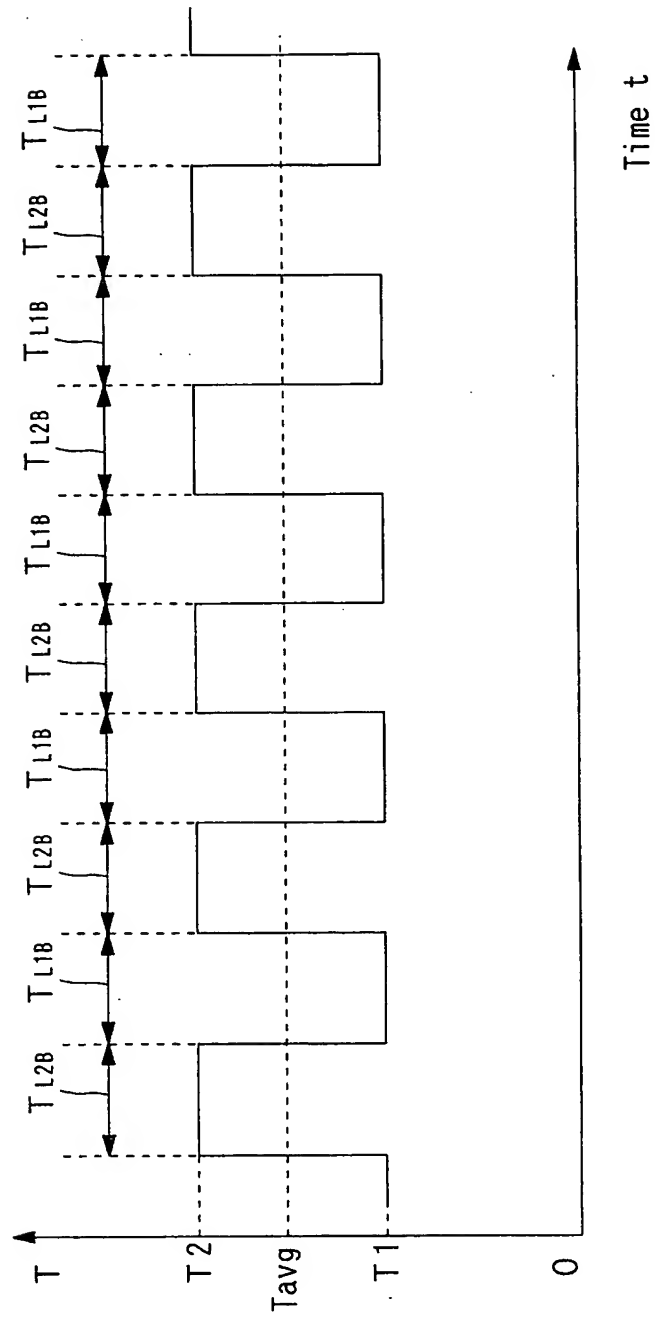


Fig. 10



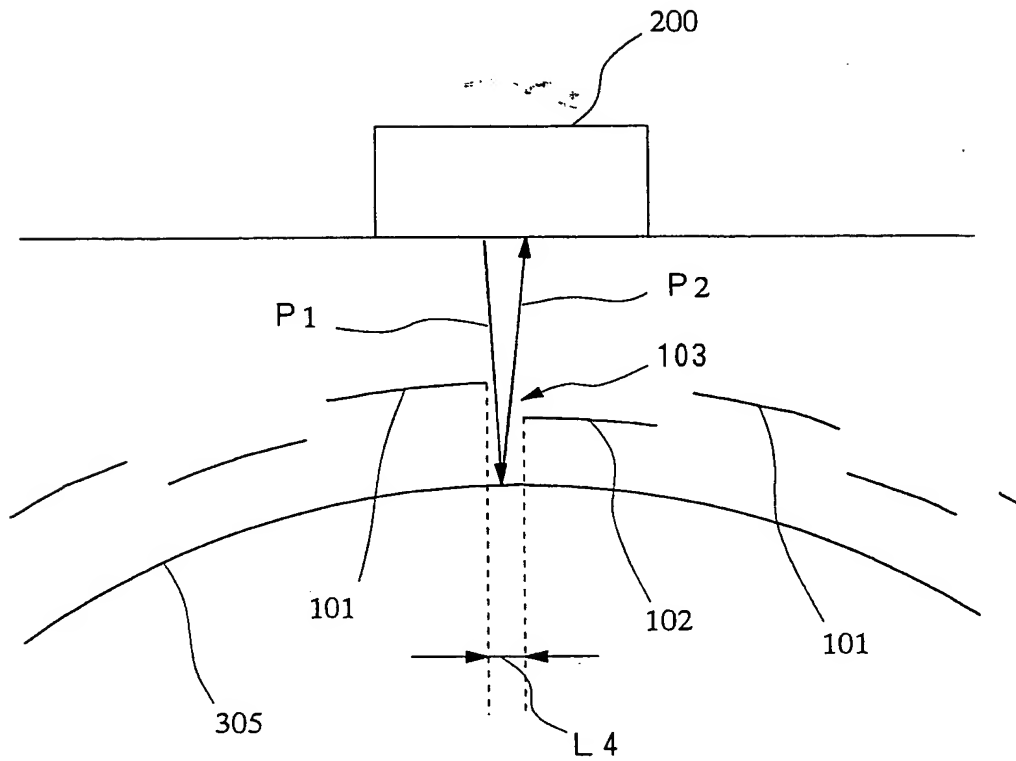
*Fig. 11*



Fig. 12

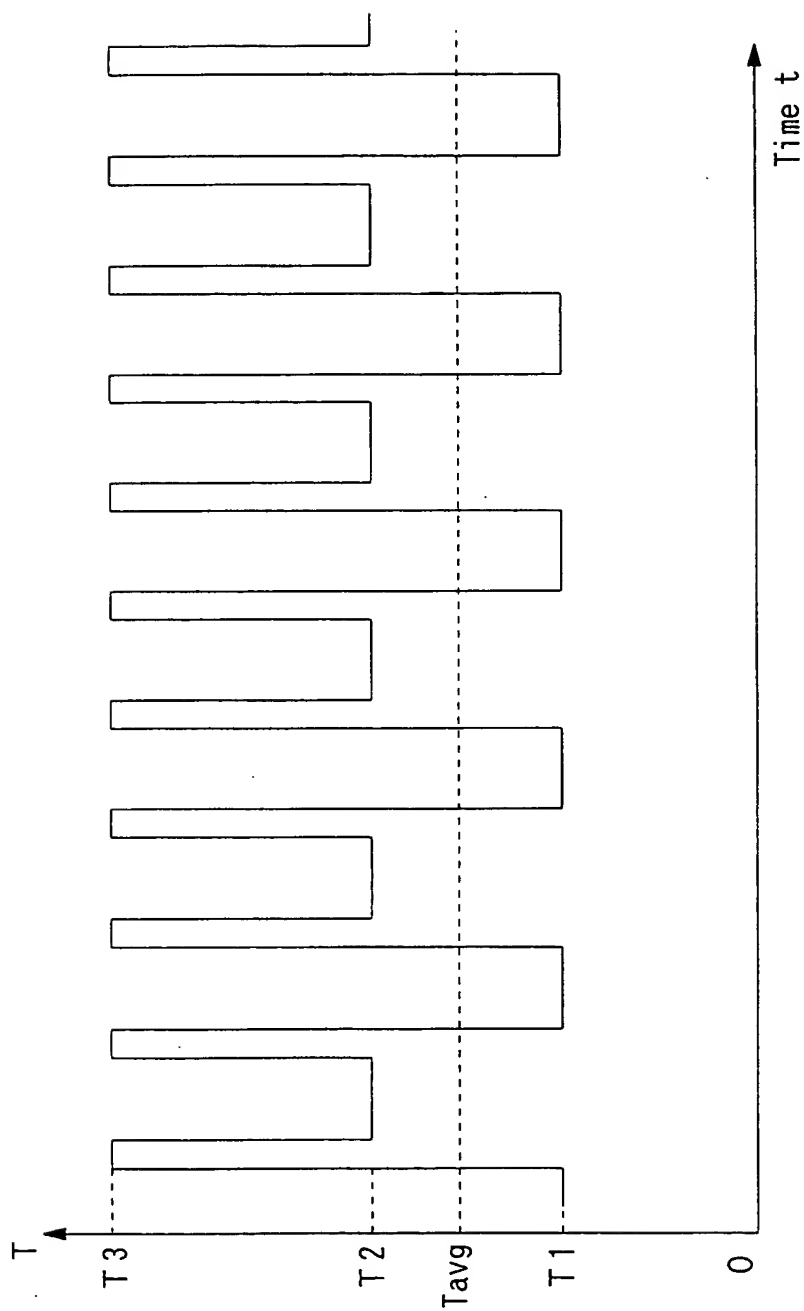
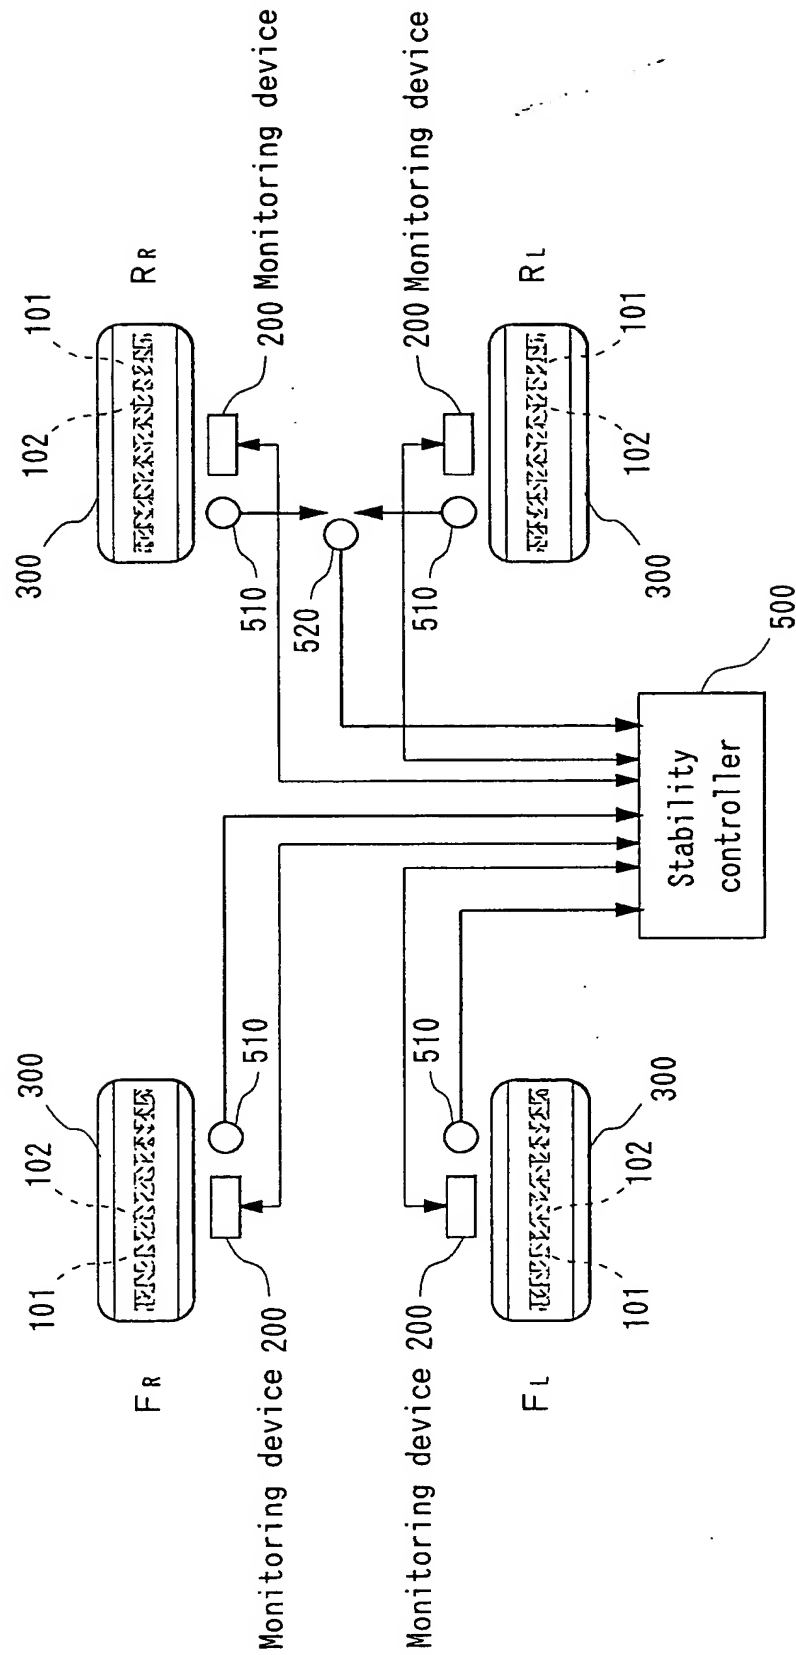
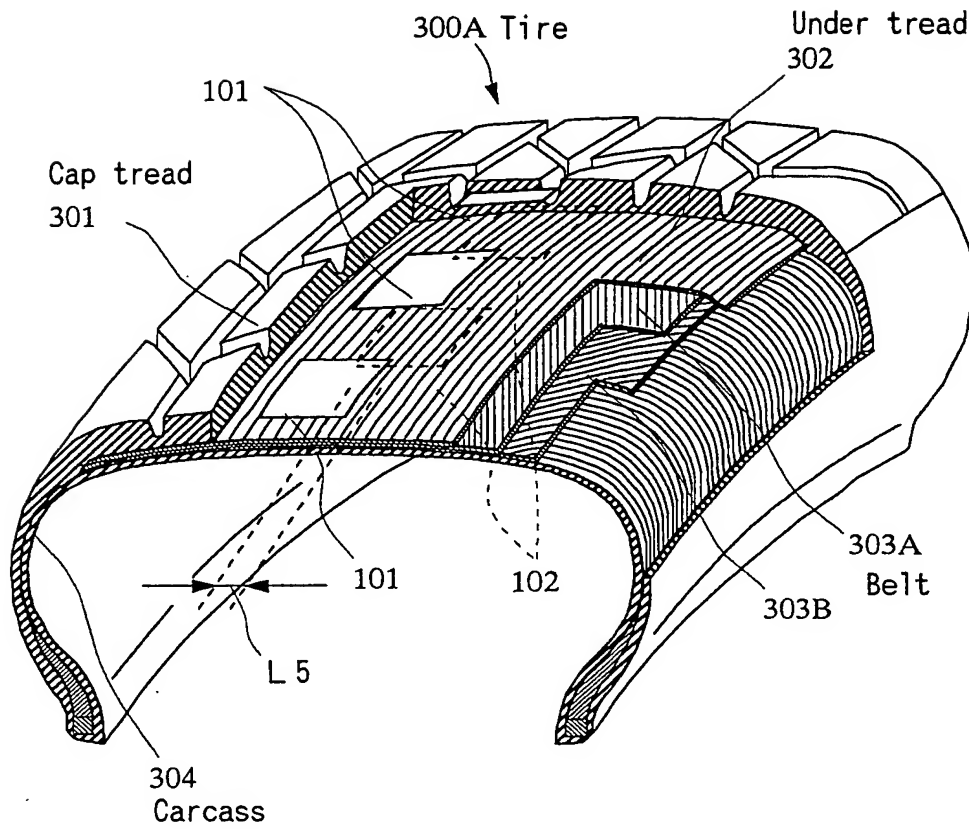


Fig. 13





*Fig. 15**Fig. 16*